owner's bath-½ bath-laundry-bedroom renovations

DESIGN BUILDER WISCONSIN LICENSED INSURED CREDENTIALED
3D Concept Design, revisions, planning, budget, project management, inspections
Design measure, concept, plan, prints,
Permit project build prints and submission, city building and inspections meetings
Demolition entry door trim (bath side only), base trim, vanity, cabinetry, counters, mirrors, lighting, tub, shower surround, tile flooring, shower partition wall, plumbing, shower tile, bath entry door, labor
Framing-Build shower walls, close-off laundry, 2x6 ½ wall with niches, shower niche, seat, labor, materials
Plumbing relocations, toilet, sink(1), shower + sink fixtures, wand rail, supply + drain lines, labor, materials
Electrical sconces(2), can lights(4), exhaust fan + heat, switches, dimmers, GFCI outlets, labor, materials
HVAC permit, exhaust fan and supply connections, labor, materials
Insulation vapor barrier installation as needed, inspection, labor, materials
Shower-board shower surround, labor, materials
Green-board main area, repairs, laundry room ceiling repair, labor, materials
Tile shower walls and bath floor, floor base trim, labor, materials
Cabinetry 72" vanity cabinet, labor, materials
Stone Countertop slab stone, labor, materials
Doors-Trim barn door, handles, mount rail, hardware, door and base trim, labor, materials
Waste debris offsite disposal, daily clean-up, labor, materials
Paint bathroom walls, door, trim, labor, materials
Zero Entry Shower floor system, subfloor modification, recessed floor joist support, labor, materials
Amenities bath mirror, 2- bath + towel holders, TP holder, grab bars, labor, materials

½ Bath remove vanity, toilet, vanity with sink, sink fixture, mirror, sconce.
Install new toilet, vanity, mirror, sconce, plumbing, electrical connections, labor, materials

Laundry Room remove countertop, sink, cabinets, laundry shelf, shoe mold, sheet vinyl floor.
Build and install washer and dryer raised base + shelf, purchase and install new laminate flooring, cabinets, laminate countertop, base and shoe trim (previous door), labor, materials

Bedroom remove carpet and pad, install new memory foam pad and carpet, labor, materials

OPTIONS/UPGRADES/CHANGES (below)

CAD Drawings

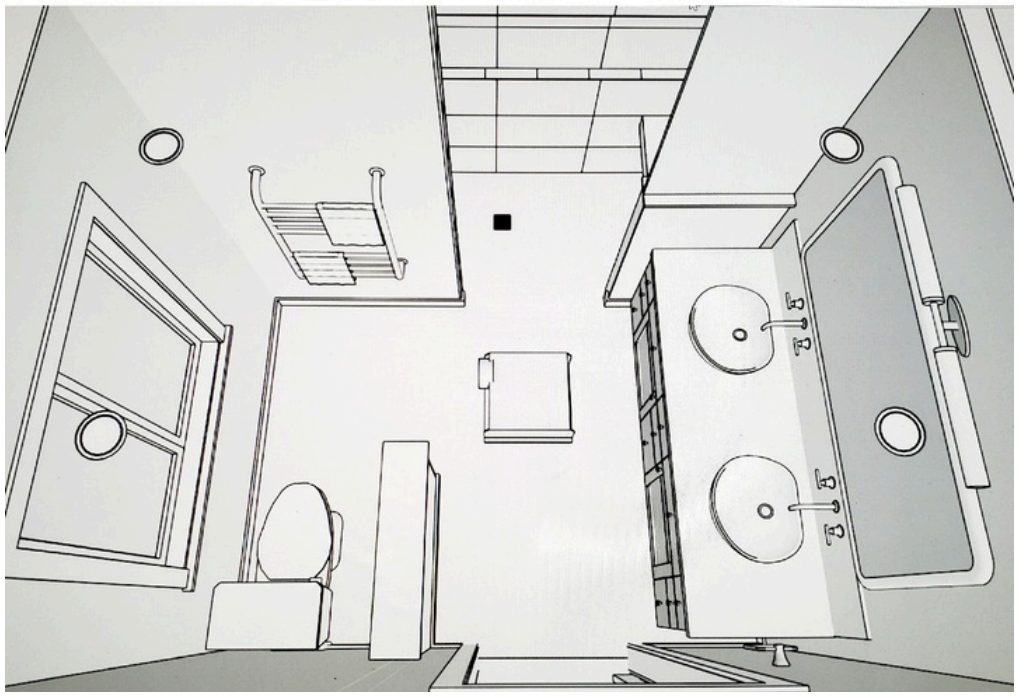

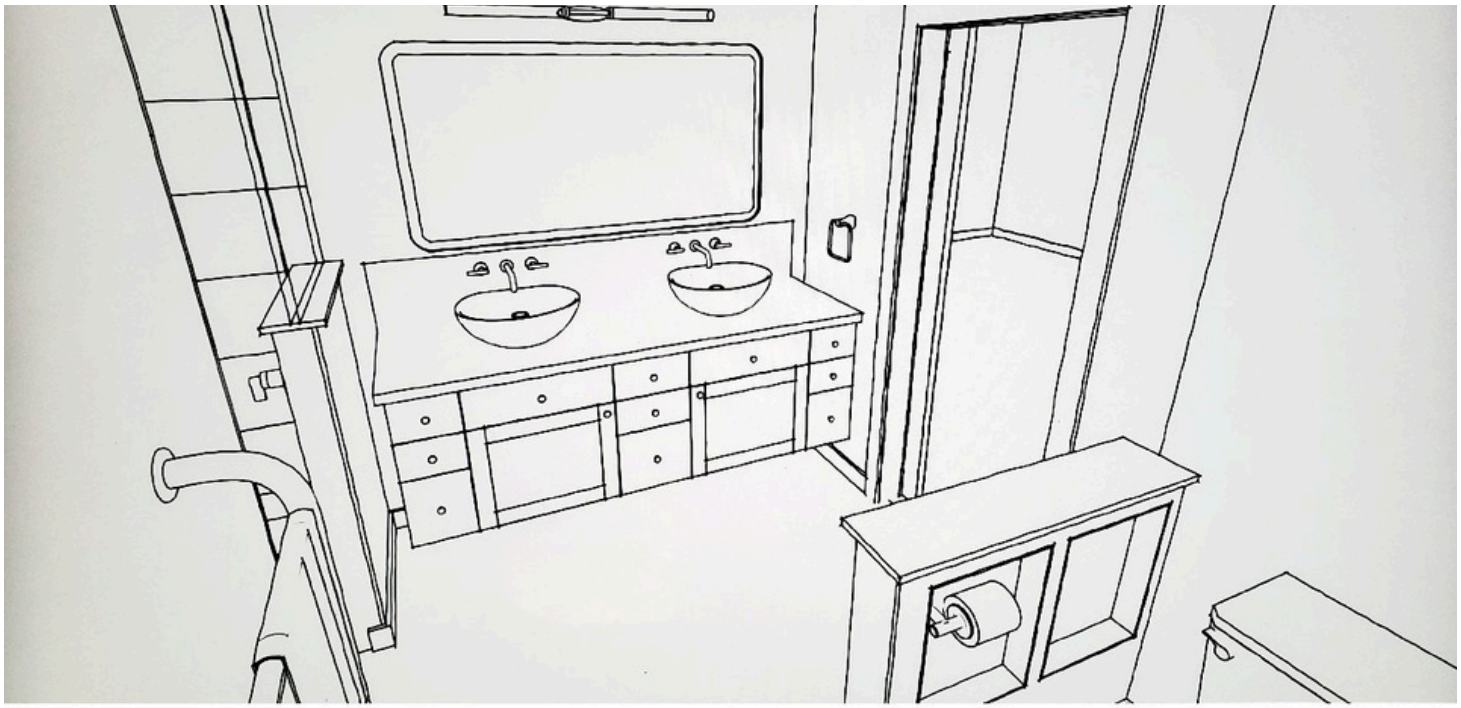
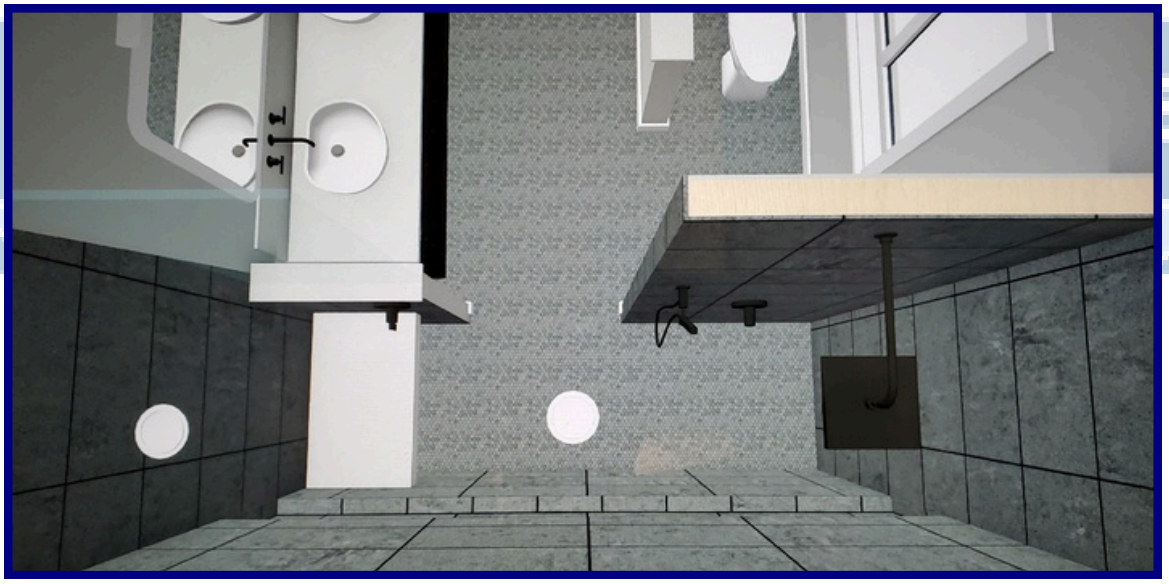
3D Renderings